



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 25 February 2004

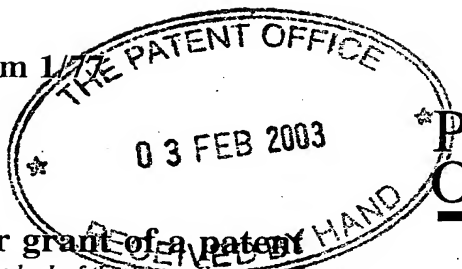

The  
Patent  
Office04FEB03 E782053-1 D00027  
P01/7700 0.00-0302432.0

1/77

- 3 FEB 2003

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	29.79990		
2. Patent application number (The Patent Office will fill in this part)	0302432.0		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Helifix Limited 21 Warple Way London W3 ORX		
Patents ADP number (if you know it)	8558322001		
If the applicant is a corporate body, give country/state of incorporation	United Kingdom		
4. Title of the invention	Wall Reinforcement System		
5. Name of your agent (if you have one)	Frank B. Dehn & Co.		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	179 Queen Victoria Street London EC4V 4EL		
Patents ADP number (if you know it)	166001 ✓		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

15

Claim(s)

-

Abstract

-

Drawing(s)

3

10. If you are also filing any of the following, state how many against each item.

Priority documents

-

Translations of priority documents

-

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

-

Request for preliminary examination and search (Patents Form 9/77)

-

Request for substantive examination (Patents Form 10/77)

-

Any other documents (please specify)

-

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 3 February 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Matthew Hall  
020 7205 0600

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s) of the form. Any continuation sheet should be attached to this form.
- If you have answered 'Yes', Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## Wall Reinforcement System

5 The present specification relates to a wall reinforcement system, in particular but in no way limited to, a method of reinforcing a veneer wall by tying it to a back-up wall, to a connector for securing a wall tie to a length of reinforcement wire and to an arrangement for reinforcing a wall constructed from inner and outer leafs of masonry against seismic or wind loading conditions.

10 To meet the needs of new building codes, the use of reinforced masonry veneers is becoming more common. These known systems can reinforce walls against seismic conditions and high wind loads by restricting relative movement perpendicular to the plane of the two leafs of masonry constituting the wall. Most systems currently available are based on ladder-and-truss  
15 reinforcement, with some using metal or plastic connectors attached to "loop" ties fixed to the back-up wall. In these systems a wire is fastened into the connector and laid along the bed joint as the wall is built. The systems can be difficult to install and end-play of the connectors hard to reduce to suitable limits.

20 There is a need for a simpler system which is easier to install in new buildings and cheaper to manufacture.

25 After a seismic event, masonry may become damaged and need to be repaired or may need to be upgraded to meet current needs. Various methods have been offered to meet these needs using ladder-and-truss reinforcement, but these are generally disruptive, requiring the masonry to be partially dismantled to permit installation, and they make it difficult to ensure that the veneer is re-instated satisfactorily and that the final appearance is to an  
30 acceptable standard.

There is therefore also a need for a simpler system which is easier to install in an existing building as a repair or an upgrade which is less disruptive than previous methods and which improves the standard of the final appearance.  
35

According to a first aspect of the present invention, there is provided a method of reinforcing a veneer wall by tying it to a back-up wall comprising:

installing a fastener into the back-up wall, the fastener having a threaded portion which extends substantially at right angles from the surface of the back-up wall to provide a thread for engagement with a connector;

5 fitting the connector on to the threaded portion of the fastener, the connector engaging with the thread such that removal of the connector is prevented without rotation of the connector, the connector further having a portion for receiving a reinforcement wire;

10 fitting the reinforcement wire in to said receiving portion of the connector, the reinforcement wire extending substantially at right angles to the fastener and preventing rotation of the connector with respect to the fastener; and

integrating the reinforcement wire with the veneer wall by securing the reinforcement wire within a mortar bed joint of the veneer wall.

15 Preferably the fastener is a metal wall tie, preferably of the helical type made from twisted profiled wire. Although the fasteners could be in the form of a simple flat twisted strip, more preferably they are in the form of twisted wire having a more complicated cross-sectional profile in the form of a cross or a star ("twisted profiled wire"), so that the tie has a well-defined longitudinally  
20 extending core (for transmitting tensile forces) and radiating fins which have been twisted into a helical structure (for mechanical engagement with the masonry). These wall ties can be driven into a masonry back-up wall using a suitable percussion tool, the wall ties being allowed to rotate as the fins cut a helical path into the masonry to form a mechanical interlock with the  
25 masonry. Such a wall tie system is available through Helifix Ltd and marketed under the name "DryFix"®. For other installation systems it may be more preferable to install the wall tie or other fastener by first drilling a pilot hole and then securing the tie to the back-up wall using an adhesive, such as a resin or cement.

30 Although for the majority of applications the connector and reinforcement system are intended for use with a masonry back-up wall, e.g., brick, concrete, block etc, this need not be the case as the veneer reinforcing system could attach to back-up walls of other materials. In one embodiment  
35 envisaged herein, the tying system is used to secure a veneer wall to a timber back-up wall.

The important point of the fastener is that it extends substantially at right angles to the plane of the back-up wall and that it is fixed securely to the back-up wall to provide an anchorage in the form of a thread for the connector and reinforcement wire assembly.

5

10 In the case of the wall ties made from twisted profiled wire, the twist of the wire means that helical fins provide a thread along their entire length for the connector to engage with; the portion of the wall tie protruding from the back-up wall is therefore the "threaded portion" referred to above. The thread of these wall ties is of a much larger pitch than that typically provided on standard bolts, for example, of the order of 40mm (the helical fins of the preferred wire creating a peak when viewed from the side every 20mm because of the helical path of the second fin extending from the opposite side of the core to the first fin). This large pitch makes fitting of the connector by  
15 screwing it on to the wall tie a quick operation. Such ties also benefit from being easy to manufacture as long lengths of twisted profiled wire which are then cut into suitable sizes of wall tie, they can be installed in the back-up wall easily with a percussion tool as discussed above and they provide drip points along their length due to their helical nature so that moisture does not  
20 cross the cavity between the veneer wall and the back-up wall. They can also be used as a repair wall tie to replace existing ties that have corroded or to reinforce an existing structure that has been found to be subsiding or has suffered damage from a seismic event. Such forms of fastener are significantly easier to install and cheaper to manufacture than the more  
25 complicated ladder-and-truss or plate type arrangements of the prior art. The provision of a long thread, where the connector can engage anywhere along the exposed part of the fastener, also allows for greater freedom for positioning of the connector and reinforcement wire.

30 In another embodiment, the wall tie could be a length of twisted profiled wire having two or more sections of different external diameter. For example, a wider external diameter portion may provide greater anchorage in a softer back-up wall material but such a diameter might be too large for the mortar bed of the veneer wall and so a smaller external diameter may be required for  
35 this portion. In some applications, the two diameter tie may be more appropriate the other way around with the narrower diameter portion secured into the back-up wall.

However, other forms of fastener are also envisaged as being suitable for this system although are not as preferred as the wall ties discussed above because of component costs and ease of installation. The fastener may take the form of an expandable anchor having a thread provided on one end for engagement with the connector. Other arrangements for securing the fastener to the back-up wall are also envisaged and the arrangements described herein are in no way intended to be exhaustive.

The end of the fastener protruding from the back-up wall includes a thread for attachment of the connector. In the preferred embodiment of wall ties made from twisted profiled wire, the longitudinal elevation (i.e., when the tie is viewed from the side) takes the form of a series of peaks and troughs as the fins spiral around the core of the wall tie. The peaks define a maximum external diameter of the wall tie and the troughs define the minimum diameter. The connector, which is preferably in the form of a closely fitting sleeve that fits over the protruding end of the wall tie, has a narrowed section or restriction where the separation of opposing portions of the internal surface is less than the maximum diameter of the wall tie but greater than the minimum diameter, i.e., the opposing surfaces of the narrowed section fit within the trough of the fins.

In the most preferred embodiment, the connector consists of a metal tube having a crimped section defining two opposed flat surfaces of separation  $s$  where  $d_{\min} < s < d_{\max}$ , and  $d_{\min}$  and  $d_{\max}$  are the minimum and maximum diameters of the wall tie respectively. The crimped section may be at the end of the tube, adjacent the end of the tube or further up the tube in a central region. The flat surfaces engage with the edges of the fins on the wall tie so that the connector can only be pulled off the wall tie by rotating the connector to unthread it from the wall tie.

By "closely fitting", it is intended that the sleeve should have an internal diameter of not more than one or two millimetres greater than the maximum external diameter of the wall tie, preferably less than one millimetre and more preferably less than half a millimetre, in order to reduce the amount of lateral end play between the connector and the wall tie, i.e., there should be just sufficient gap to provide clearance for ease of fitting. In some preferred embodiments it may be necessary to tap the connector on to the wall tie with



a hammer or other similar device. The connector is of a length which preferably can receive a portion of the wall tie equivalent in length to more than three times the maximum external diameter of the wall tie, more preferably more than five times the diameter, again in order to avoid lateral play between the end of the wall tie and the sleeve connector.

In its simplest form, the connector is a tube having a crimped section at or close to one end. In more preferred embodiments, at least a second crimped section is provided for engagement with the fins of the wall tie to reduce longitudinal end play and this may also provide greater pull-off strength. Due to the direction of oscillations experienced during a seismic event or adverse wind loading, i.e., perpendicular to the plane of the veneer wall, it is important to minimise the longitudinal end play in the connector. Lateral end play is less important because the components are encased in mortar or other filler material, although too much lateral play can make the system appear inferior. More than two crimped sections (e.g., three or four) can be provided as necessary.

The crimped section may be formed with a tool to create an indent of a width corresponding to the full width of the trough in the side-on profile of the wall tie (say, between 2-5mm wide) or may be formed by a tool with narrow jaws, which can be easier to operate, creating a narrow line of deformed material (about 1mm wide or less). Where the indents are narrow, it is preferable to include a second set of indents spaced from the first set at an appropriate location so that longitudinal end play in the system is minimised and there is engagement with the fins of the wall tie as soon as longitudinal movement of the connector occurs. The indents are preferably made on what are the upper and lower surfaces in use. This has the advantage that any lateral deformation, i.e., bulging of the connector caused through squashing during crimping, is in the plane of the bed joint. Where two or more sets of crimped sections are provided, preferably these are also arranged on the upper and lower surfaces so that any lateral bulging of the connector from these also extends in the plane of the bed joint.

Thus from a second aspect, the present invention provides a connector for connecting a reinforcement wire to a wall tie extending substantially at right angles to the reinforcement wire, the wall tie comprising a twisted wire having

helical fins extending therealong, wherein the connector comprises:

a tube of internal diameter which closely fits the external diameter of the helical fins of the wall tie for providing a sleeve which engages over one end of the wall tie;

5 a hole passing through opposing sides of the tube wall substantially at right angles to the longitudinal axis of the tube, the hole being of a size for receiving the reinforcement wire; and

at least one region of narrowed internal diameter for engaging the helical fins of the wall tie to prevent withdrawal of the wall tie from the connector without respective rotation between the connector and the wall tie.

In one preferred embodiment, the tube has an internal diameter of between 6 and 12mm, preferably within 7 and 10mm and most preferably of about 8mm. An internal diameter of 8mm is most preferred for a helical tie of 8mm external diameter. Larger internal diameters, e.g., 10mm or larger would be required where larger diameter helical ties are being used. One preferred helical tie which has been found to have good strength properties has an external diameter of 10mm, so for such a tie a preferred connector may have an internal diameter of 10-12mm. The tube is preferably of a length of between 50 and 100mm, more preferably between 60 and 90mm and most preferably about 65-80mm long. Preferably the connector has an external diameter of 10mm or less, most preferably about 9.5mm. In this way the connector can fit within the space of a typical mortar bed joint, which is usually of a height of 10-12mm. Larger external diameters can also be accommodated by siting the connector on a bed joint at the junction of a pair of bricks, as the junction provides additional space for, for example, a top portion of the connector to extend into. If necessary, the corners of the bricks can be removed to provide more room for the connector.

30 The region of narrowed internal diameter preferably reduces the distance between opposed internal surfaces of the tube by 1mm, more preferably 2mm and yet more preferably by greater than 2.5mm (e.g., for the 8mm internal diameter version). The hole for the reinforcement wire is preferably of a diameter which is 1mm less than the internal diameter of the tube or smaller, more preferably 2mm less than the internal diameter and most preferably more than 2mm smaller than the internal diameter of the tube. Preferably the narrowed region comprises two flats, e.g., from crimping the tube, the

two flats extending in a direction parallel to the axis of the hole for the reinforcement wire and perpendicular to the axis of the tube. Depending on the shape of the jaws of the crimping tool, the surfaces may have some other profile, e.g., convex or concave. The connector may be made from any  
5 suitable strong metallic material such as stainless steel, aluminium, copper and mild steel. When the system has been embedded in the mortar of the bed joint, it is effectively encased in a dry, air-free, alkaline environment. If the connector is of a size which extends into the cavity behind the veneer wall then it should be of stainless steel or a galvanised material to minimise  
10 possible corrosion.

It is also envisaged that the connectors can be moulded from a suitably hard plastics material, the narrowed section being moulded as an integral part of the connector rather than being formed by crimping. When such a connector  
15 is encased in mortar or a similar hard bed joint material, the sides of the connector are locked in position around the thread of the fastener.

Forming the narrowed section by crimping means that the construction of the connector is simple and can even allow for the tube to be crimped on-site just prior to installation on the fastener, or even in situ once the connector has  
20 been positioned on the fastener with a suitable crimping tool. However, because inspection of the fitted connector is impossible once it is encased in the bed joint, it is preferred that the connector arrives on-site in a ready-crimped form to avoid the risk of possible poor on-site fitting.

25 If desired, the connector can be of more complex construction having a narrowed section formed by providing additional material, e.g., by casting or moulding, or by the provision of an internal thread, or even include a hardened internal member of a form which creates a constriction for  
30 engagement with the fins of the wall tie. In some embodiments, an internal thread of a pitch substantially matching that of the fastener (e.g. two threads of 40mm pitch) can be provided in the bore of the connector rather than the restriction described above. Whilst such a connector would benefit from greater contact surface area over which the tensile forces are spread, it has  
35 been found that the simple indents are sufficient to transmit these forces, with the pull-off strength being governed by the strength of the helical fins of the twisted profile wire, not the strength of the indents. The system could also

extend to connectors having an external thread for engagement with an internal profile of the fastener, although in view of the far more complex construction required, such a system is regarded as being undesirable from a commercial point of view.

5

The receiving portion of the connector that is provided for the reinforcement wire preferably takes the form of a hole passing through the opposite end of the connector to that engaging the thread of the fastener. In this way the reinforcing wire can be threaded through the hole of one connector, through  
10 the hole of an adjacent connector and so forth along the mortar bed joint to link a plurality of connectors and wall ties to a single length of reinforcement wire. In the most preferred embodiment, the connector is a length of metal tube which has been drilled at right angles to the length of the connector thereby forming two opposed holes in the wall of the tube of smaller diameter  
15 than the external diameter of the tube, thereby forming a passage which extends substantially at right angles to the longitudinal axis of the tube (i.e., the hole for threading the reinforcement wire through).

Arrangements are envisaged where the axis of the tube and the axis of the  
20 hole forming the receiving portion are off-set in relation to each other, but preferably these are in-line to minimise the space required in the mortar bed joint. This can be seen in contrast to many of the known ladder-and-truss systems where the plate-type fasteners have raised lugs on their surface to clasp a reinforcement wire.

25

In other embodiments, the connector may be solid at this receiving portion. The internal surface of the receiving portion may be just a hollow or formed into a hook-like arrangement in which the reinforcement wire is located. Such an arrangement may be preferred for repair applications where a  
30 connector is being hooked on to an existing reinforcement wire.

35

The engaging surface of the receiving portion should be of a shape which does not permit rotation of the connector once the reinforcement wire has been installed, for example, as a result of engagement of the sides of the connector with the surface of the reinforcement wire blocking the rotation. Again the receiving portion should closely fit the external profile of the reinforcement wire so as to reduce the amount of play in the system where possible. If

desired, the connector could be provided with two, three, or more receiving portions, e.g., additional holes, for receiving additional reinforcement wires which can be laid in parallel along the bed joint as required.

5 The reinforcement wire can be of any size to suit the conditions. Typically it is of 9 gauge (3/16" or 5mm) and could be of circular profile or a more complicated profile, for example of twisted profiled wire material, the fins of which can then grip the mortar of the bed joint. The material of choice is stainless steel although other materials which would not corrode in that  
10 environment may also be suitable and provide a cheaper alternative. The reinforcement wire preferably extends along the length of the wall, and more preferably around the building to reinforce the structure. More than one (e.g., two, three or four) parallel reinforcement wires may be provided in the mortar bed joint of the veneer wall.

15

Thus according to a third aspect of the present invention disclosed herein, there is provided a system for reinforcing a veneer wall against seismic conditions or wind loading comprising:

20 a fastener which is installed into a back-up wall of a structure, the fastener having a threaded portion which extends substantially at right angles from the surface of the back-up wall to provide a thread for engagement with a connector;

25 a connector which is fitted on to the threaded portion of the fastener, the connector having means for engagement with the thread of the fastener such that removal of the connector is prevented without rotation of the connector, the connector further having a portion for receiving a reinforcement wire;

30 a reinforcement wire which is fitted in to said receiving portion of the connector, the reinforcement wire extending substantially at right angles to the fastener and preventing rotation of the connector with respect to the fastener; and

the connector, reinforcement wire and preferably a portion of the fastener being encased in filler material provided within a bed joint of the veneer wall to integrate the reinforcement with the veneer wall.

35

When the system is applied to a new building, the components are fitted at appropriate positions as the courses of masonry are laid, in the process the

connector, a small portion of the fastener and the reinforcement wire are preferably encased in the mortar of the bed joint. When the system is applied to an existing building as a repair, mortar is first removed from a bed joint in the veneer wall, the fasteners are inserted into the back-up wall, connectors  
5 are fitted to the fasteners and a reinforcement wire is then threaded through or hooked to the connectors to link them all together, in so doing preventing further rotation of the connectors. Once all the components are in place, a bonding filler material can be applied to the bed joint to encase the components and seal them from external conditions. This can be a resinous,  
10 e.g., epoxy or polyester based, filler material but is more preferably a cement based material which ensures a good bond to the existing brickwork. Traditional mortar can then be used as necessary for the final pointing to match the pointing of the rest of the building.

15 In accordance with one further aspect of the present invention, there is provided a method of reinforcing a wall against seismic or adverse wall loading conditions comprising:

driving one end of a helical wall tie into an inner leaf of said wall, the wall tie being secured in position through mechanical interlock with the inner  
20 leaf without the presence of an adhesive, the wall tie having a second end extending substantially at right angles to the plane of the wall;

placing a connector over the second end of the wall tie, the connector comprising a portion having a narrowed diameter defined by opposed flats, the flats having a spacing which is less than the external diameter of the  
25 helical fins of the wall tie such that withdrawal of the connector along the helical fins of the wall tie requires rotation of the connector, the connector further having a portion with a hole for receiving a reinforcement wire therethrough substantially at right angles to the wall tie;

threading a reinforcement wire through said hole of the connector;

30 securing the reinforcing wire and connector in a filler material within a bed joint of a second leaf of the wall.

Certain preferred embodiments of the present invention will now be described by way of example only and with reference to the accompanying  
35 drawings in which:

Figure 1 illustrates a side view of a preferred fastener for the back-up wall;

Figure 2 illustrates a side view of another fastener;

Figure 3 illustrates a perspective view of a preferred connector for engagement with the fastener of Figure 1;

5 Figure 4 illustrates the end view of the connector of Figure 3 from the direction shown by Arrow A in Figure 3;

Figure 5 illustrates a preferred system installed in the construction of a new building;

Figure 6 illustrates the preferred system when used as a repair on an existing building;

10 Figure 7 shows a perspective view of a further preferred connector;

Figure 8 shows a perspective view of yet a further preferred connector;

Figure 9 shows the connector of Figure 3 provided with a second set of indents; and

Figure 10 illustrates the positioning of a large connector in a bed joint.

15

As shown in Figure 1, a preferred wall tie fastener 1 consists of a twisted profiled wire 1 having pointed ends 2,3. The wall ties 1 are constructed of stainless steel which has been rolled into a desired profile, twisted into a helical section and then cut into suitable lengths. The cross-sectional profile of the wire is a cross having major and minor outwardly extending fins 4,5 radiating from a core 6. The major fins 4 provide a thread for engagement by the connector (to be described in more detail below). The wall tie 1 can be driven into the masonry using a percussion tool, the fins 4,5 acting as blades which cut a helical path into the masonry under the hammer impacts from the tool. No adhesive is required to secure the wall tie 1 in position, with the fins providing a sufficient mechanical interlock with the masonry.

25

The maximum external diameter  $d_{\max}$  of the wall tie 1 is defined by the diameter of the major fins 4. In side elevation, as these major fins 4 twist around the core 6, they are seen to define a series of peaks 7 and troughs 8 along the length of the wall tie 1. Whereas the peaks give rise to the diameter  $d_{\max}$ , the troughs have a diameter of  $d_{\min}$  equal to the diameter of the minor fins 5 in the cross-shape profile of the Figure 1 embodiment. If the minor fins 5 were not present on the wall tie 1 then  $d_{\min}$  would be equal to the diameter of the core 6. In embodiments of more complex geometry, say where three major fins are provided or where two major and four minor fins are provided,  $d_{\min}$  would be defined again by the smallest width of the wall tie

30

35

1 when viewed from the side.

An alternative wall tie is shown in Figure 2 having two sections X,Y of differing external diameter. For certain soft materials, e.g., aerated concrete blocks, a larger maximum diameter of helical fin  $4_{\max}$  may be required to secure the wall tie in position, and a smaller diameter of major helical fin  $4_{\min}$  may be required (e.g., once sleeved with the connector) in order to fit within the bed joint of the veneer wall. In normal use as a wall tie, the wall tie shown in Figure 2 would be used the other way around with the smaller diameter portion being driven into the back-up wall. Depending on the nature of the back-up and veneer wall materials, in certain applications it may be more appropriate to use the tie the other way around, say, where the helical fins of the tie are actively engaging the back-up wall and a portion of the veneer wall (e.g., mortar in the bed joint) to provide a wall tying function in addition to providing a thread for engagement of the connector 10 for reinforcement against seismic events.

In Figure 3 there is shown a perspective view of a preferred connector 10 comprising a length of metal tube of internal diameter D (see Figure 4) where  $D > d_{\max}$ . The connector includes a narrowed section 11 where the connector 10 has been crimped between a pair of opposed jaws of a crimping device (not shown). This reduces the internal diameter D of the connector 10 by providing two opposed, preferably flat, surfaces 12,13 of separation s where  $s < D$  and  $d_{\min} < s < d_{\max}$ . Thus when the connector 10 is sleeved over the end 3 of the wall tie 1 protruding from the back-up wall, the flat surfaces 12,13 of the narrowed section 11 sit in-between the peaks of the wall tie 1 and engage the edges of the major fins 4 so that the connector 10 can only be removed from the wall tie 1 by unscrewing it, and hence rotating it with respect to the wall tie 1. The major fins 4 therefore act as a large thread which the flat surfaces 12,13 of the narrowed region 11 engage with. In this way, once a first end 2 of the wall tie 1 has been driven into the back-up wall with a percussion tool, the connector 10 can be easily fitted on to the other end 3 and into position on the bed joint of the veneer wall for receiving the reinforcement wire.

A hole 14 is provided in the other end of the connector for receiving a reinforcement wire 20 (see Figure 5). The hole 14 extends through both



sides of the connector substantially at right angles to the axis 15 of the connector 10 and with its axis 16 substantially in-line with the axis 15 of the connector 10. When the connector 10 is in position on the wall tie 1, the wall tie 1 does not extend so far as to obscure the hole 14. The diameter of the hole 14 is such as to receive the reinforcement wire 20 easily with minimum play. The connector 10 is of a length which preferably fits within the bed joint of the veneer wall.

In tests, it has been found that the connector 10 can withstand pull-off loads of between around 1-1.5kN. Longitudinal end-play is preferably less than 2mm, more preferably less than 1mm.

A preferred connector 10 may have an external diameter of 10mm or less, be approximately 70mm long, have an internal diameter of 8mm, have a first set of indents arranged at 10mm from one end, a second set of indents at 20-23mm from that one end, the indents narrowing the internal diameter by up to 3mm, and a hole 14 of 6mm diameter extending at right angles to the tube and arranged at 10mm from the other end for receiving the reinforcement wire.

A method of reinforcing the veneer wall 21 of a new building by tying it to a back-up wall 22 separated by a cavity 23 is illustrated in Figure 5.

First the bed joint 24 and positions where the wall ties 1 are to be inserted are selected. If required, the back-up wall 22 is drilled to provide a pilot hole for the wall tie 1. The end 2 of the wall tie 1 is then driven into the back-up wall 22 with a percussion tool leaving the other tie end 3 protruding substantially at right angles to the back-up wall 22 and lying near the centre of a brick 25 of the veneer wall 21. The connector 10 is fitted to the exposed end 3 of the wall tie 1 ensuring that it is fully engaged with the tie 1 and the hole 14 is left with its axis 16 in a horizontal position. The reinforcement wire 20, which preferably is also a helically twisted wire of smaller gauge than the wall tie 1, is then threaded through adjacent connectors so that it lies along the line of bricks 25 in the bed joint 24 of the veneer wall 21. Mortar is then applied to encase the assembly (not shown) and further courses of bricks are laid on the veneer wall 21. Additional wall reinforcement is added at predetermined intervals as required as the wall is constructed.

If desired, the pull-out capacity of the ties can be tested prior to fitting of the connector 10 using a suitable meter.

Figure 6 illustrates how the system can be adapted to provide a repair system or an upgrade for existing buildings.

In the repair method, the bed joint 24 and positions where the wall ties 1 are to be inserted are selected. The installer then drills through the veneer wall 21 into the back-up wall 22 with a pilot drill as required for the ties 1. The bed joint 24 is chased to a depth of between 30-40mm, preferably using a diamond bladed wall chaser with a vacuum attachment. No mortar should be left attached to the exposed brick surfaces to ensure a good mortar bond. All dust and mortar is then removed from the slot 26 and thoroughly flushed with clean fresh water. The bricks 25 should be left damp or primed with a suitable primer. The wall ties 1 are installed with a percussion tool into the back-up wall 22, leaving the exposed end 3 of the wall tie 1 near the centre of the brick 25. A connector 10 is fitted to the wall tie 1 ensuring that it is fully engaged with the wall tie 1 and the axis 16 of the hole 14 left horizontal. The pilot hole drilled in the mortar of the bed joint 24 may need to be made larger, although preferably not all the way to the cavity, for the larger diameter of the connector 10 as necessary. The reinforcement wire 20 is then threaded through adjacent connectors within the gap 26 of the bed joint 24. Bonding filler material, e.g., a cement based or resin based filler material, is then mixed, loaded into a suitable injector device and applied into the gap 26 of the bed joint to seal in the reinforcement wire 20 and connectors 10. Preferably about 15 to 5mm of the gap 26 is left unfilled for pointing. The bed joint is then pointed with mortar to match the mortar of the existing building.

Figures 7 and 8 show perspective views of two further embodiments for the connector 10. In these embodiments, the narrowed section 11 is formed at the end of the connector 10 rather than part way up.

In the embodiment of Figure 7, the narrowed section 11 has been formed by crimping the end of the metal tube between a pair of mechanical jaws. The connector is 65mm long, has a 10mm external diameter, an 8mm bore and has been crimped to provide an opposed set of flat surfaces which are 5mm

wide and spaced apart by 5.5mm.

5 In Figure 8 an alternative is illustrated which is moulded, e.g., from a mouldable plastics material such as nylon, to provide a tube having a narrowed section 11 at one end. The tube has an external diameter of 10mm, a bore of 8mm and a slot at one end (the narrowed section 11) of width 5mm and depth in the longitudinal direction of the connector 10 of 6mm.

10 In Figure 9 there is shown the connector 10 of Figure 3 which is provided with a second set of indentations creating a second narrowed section.

15 Figure 10 shows how a connector 10 which is of greater external diameter than the height of the bed joint 24 can be accommodated easily in the mortar of the veneer wall. If necessary, additional clearance can be created by removing the corner regions of the bricks 25. Such an arrangement can be used when attaching to wall ties 1 of 10mm diameter or greater.

20 Thus there has been described a new system and method for reinforcing a veneer wall against seismic events or adverse wind loading conditions by providing a novel connector for anchoring reinforcement wires laid in the veneer wall to wall ties protruding from a back-up wall. It is also envisaged that the connector could have further application in other systems where a layer is being tied to a back-up surface. For example, it is envisaged that the  
25 connector can be used for hanging a second surface from a ceiling back-up layer, where helical wall ties of twisted profiled wire are driven into the ceiling back-up layer and connectors are attached to the protruding ends for suspending the second surface. The second surface could be a metal grill or the like which could, for example, be used for supporting a false ceiling.

30



1/3

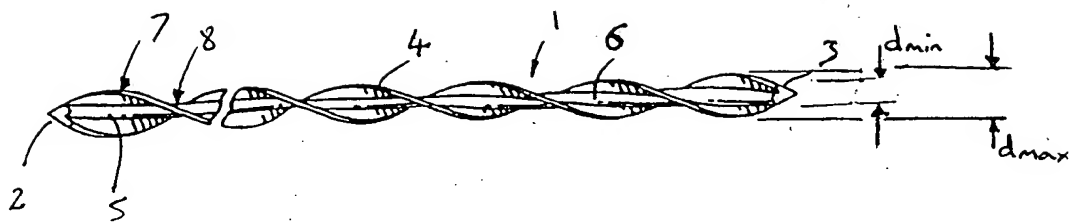


Fig. 1

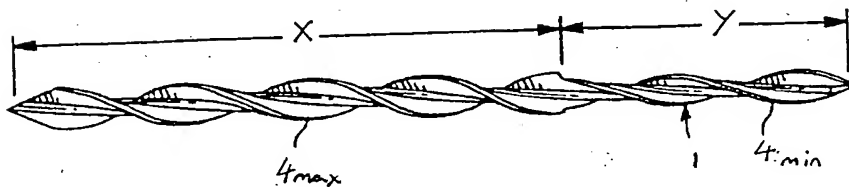


Fig. 2

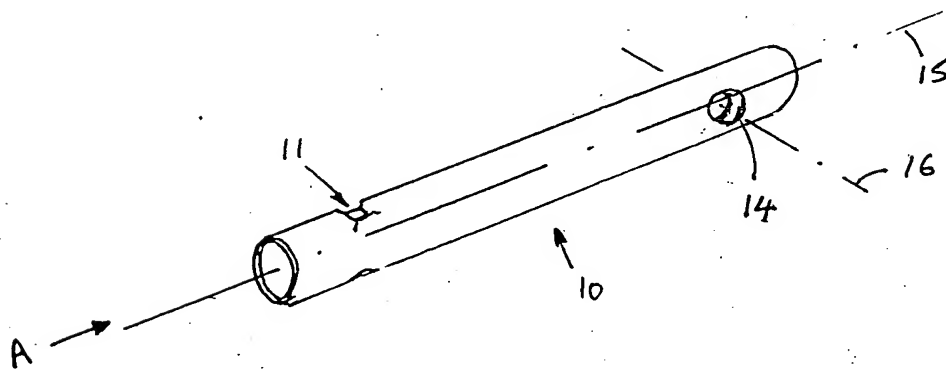


Fig. 3

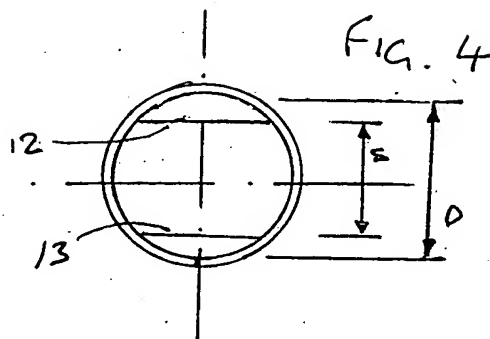


Fig. 4



2/3

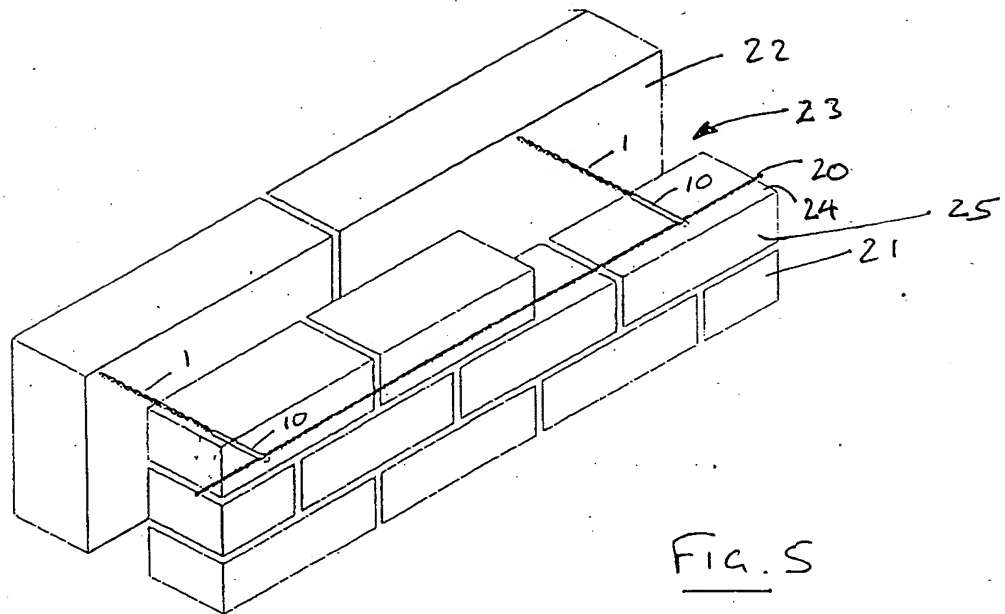


FIG. 5

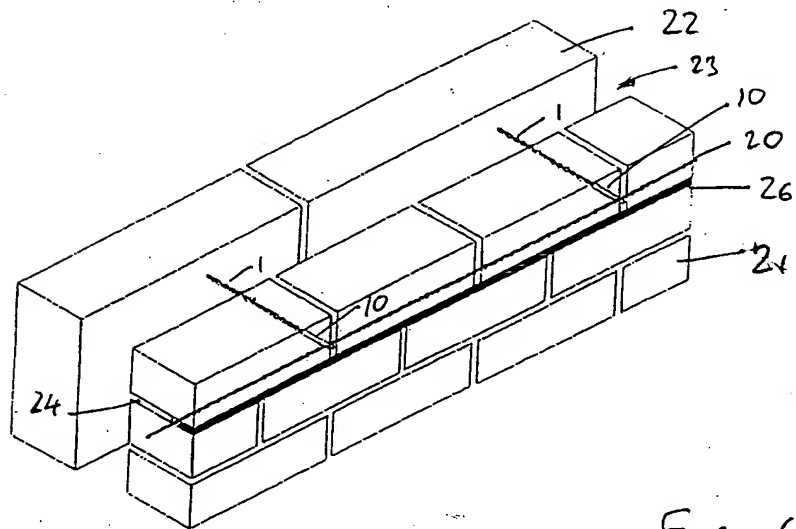


FIG. 6





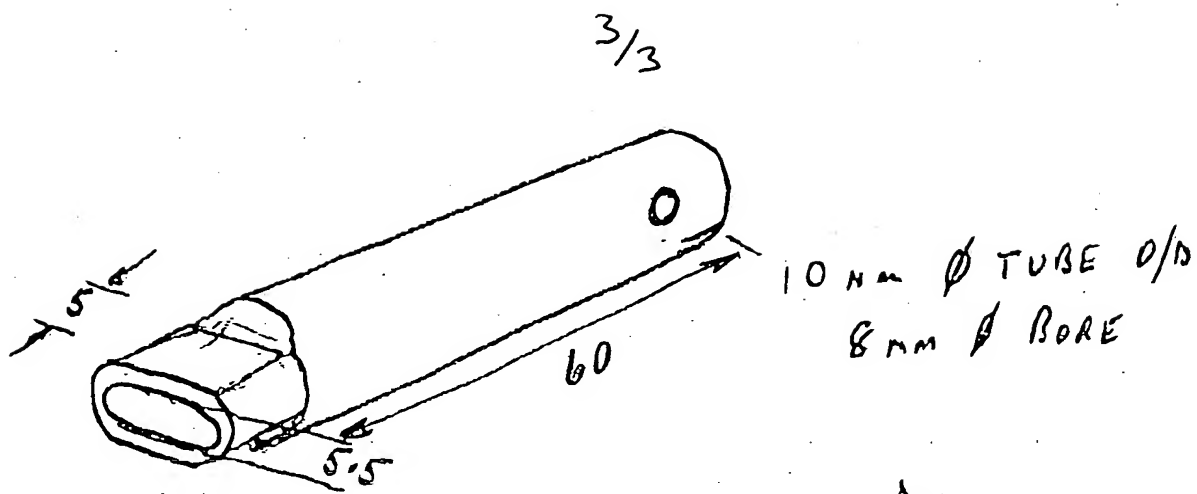


Fig. 7

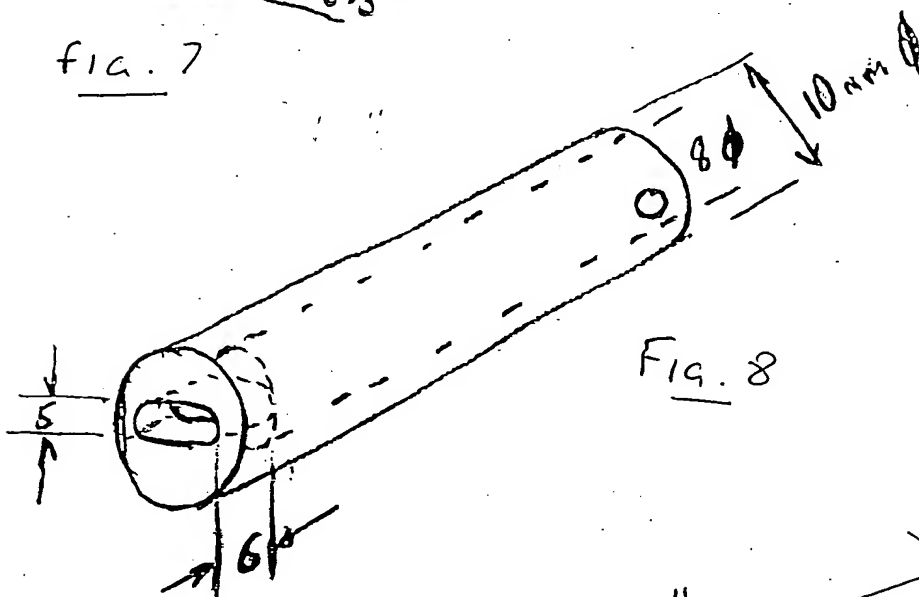


Fig. 8

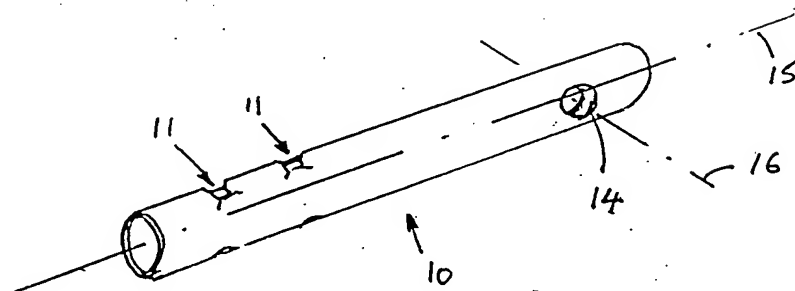


Fig. 9

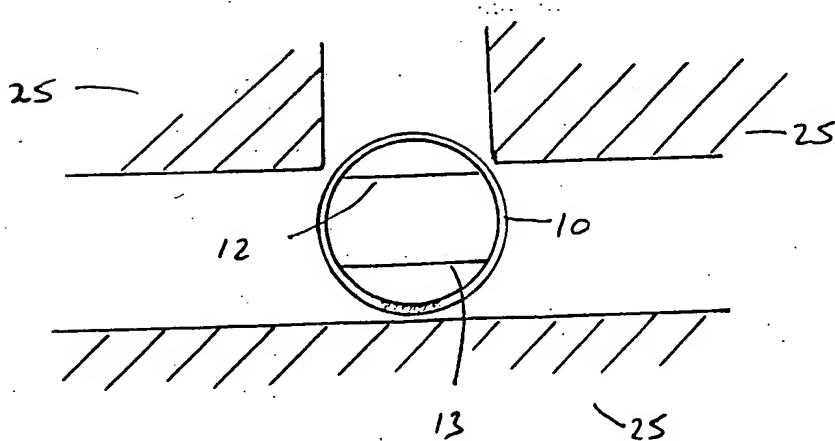


Fig. 10

**THIS PAGE BLANK (USPTO)**